




Japanese Technology since 1912

DWC

Data Book 60Hz

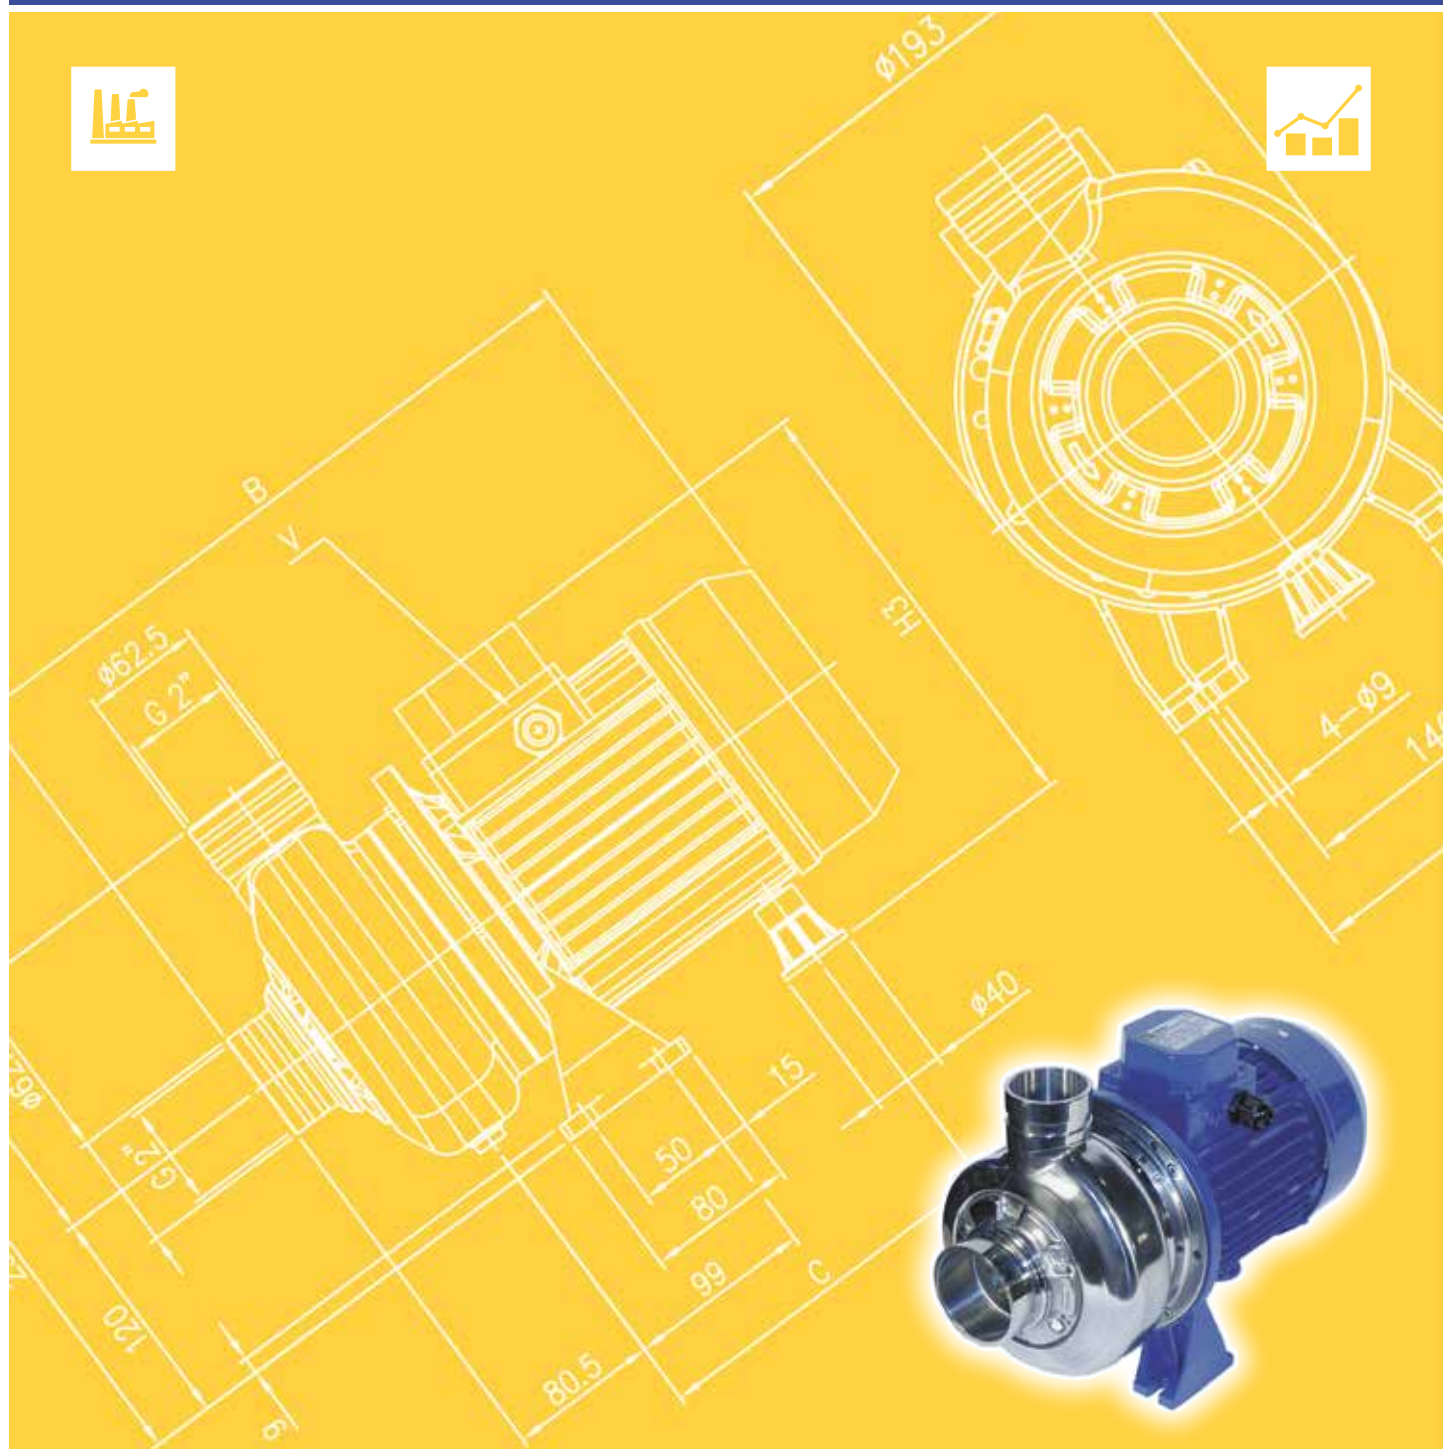

	Page
- SPECIFICATIONS	200
PERFORMANCE RANGE and SELECTION CHART	201
TYPE KEY and CURVES SPECIFICATIONS	202
PERFORMANCE CURVES DWC 300	203
PERFORMANCE CURVES DWC 500	204
- CONSTRUCTIONS	300
SECTIONAL VIEW DRAWING	300
SECTIONAL VIEW TABLE	301
MECHANICAL SEAL	302
MECHANICAL SEAL - BEARINGS	303
FLUID TEMPERATURE RANGE	304
THERMAL INSULATION	305
- DIMENSIONS and WEIGHT	400
DWC-V (VICTAULIC® CONNECTION)	400
DWC-N (THREADED CONNECTION)	401
PACKING	402
- TECHNICAL DATA	500
MOTOR DATA	500

SPECIFICATIONS

60Hz

Rev. F

PUMP		
Liquid Handled	Type of liquid	Moderate aggressive fluids, glycol solutions, liquids containing Impurities, liquids suitable for industrial washing equipments. Not suitable for clean water. For other industrial fluids please contact our TCS ¹ .
	Temperature [°C]	min. -15 max. +120 For full details see section "FLUID TEMPERATURE RANGE"
Maximum working pressure [MPa]		0,8
Construction	Impeller	Closed centrifugal type
	Shaft seal type	Mechanical seal
	Bearing	Sealed ball bearing
Pipe Connection	Suction	DWC-V Victaulic connection Ø 2" (60.3mm) DWC-N G 2
	Discharge	DWC-V Victaulic connection Ø 2" (60.3mm) DWC-N G 2
Material	Casing	EN 1.4301 (AISI 304)
	Impeller	EN 1.4301 (AISI 304)
	Casing cover	EN 1.4301 (AISI 304)
	Shaft seal	Ceramic/Carbon/EPDM
	Casing cover	EN 1.4301 (AISI 304)
	Shaft	EN 1.4301 (AISI 304) (wet extension)
	Bracket	Aluminium
Applicable standard of test		ISO 9006:2012 - Grade 3B

MOTOR	
Type	Electric - TEFC Three Phase
Efficiency Level	IE3*
No. of Poles	2
Rotation speed [min-1]	~3450
Insulation Class	F
Protection degree	IP 55
Power rating [kW]	2.2 ÷ 3
[HP]	3 ÷ 4
Frequency [Hz]	60
Voltage [V]	220/380-460 ±10%
Over load protection	User provide
Casing material	Aluminium
Base material/motor support	Aluminium
Dimensions of cable entry	PG13.5 - M20x1.5 (See DIMENSIONS TABLE page 400)

* At 220/380V efficiency level is IE2; IE3 only at 460V


¹Technical Customer Service

PERFORMANCE RANGE and SELECTION CHART

60Hz

Rev. F

PERFORMANCE RANGE

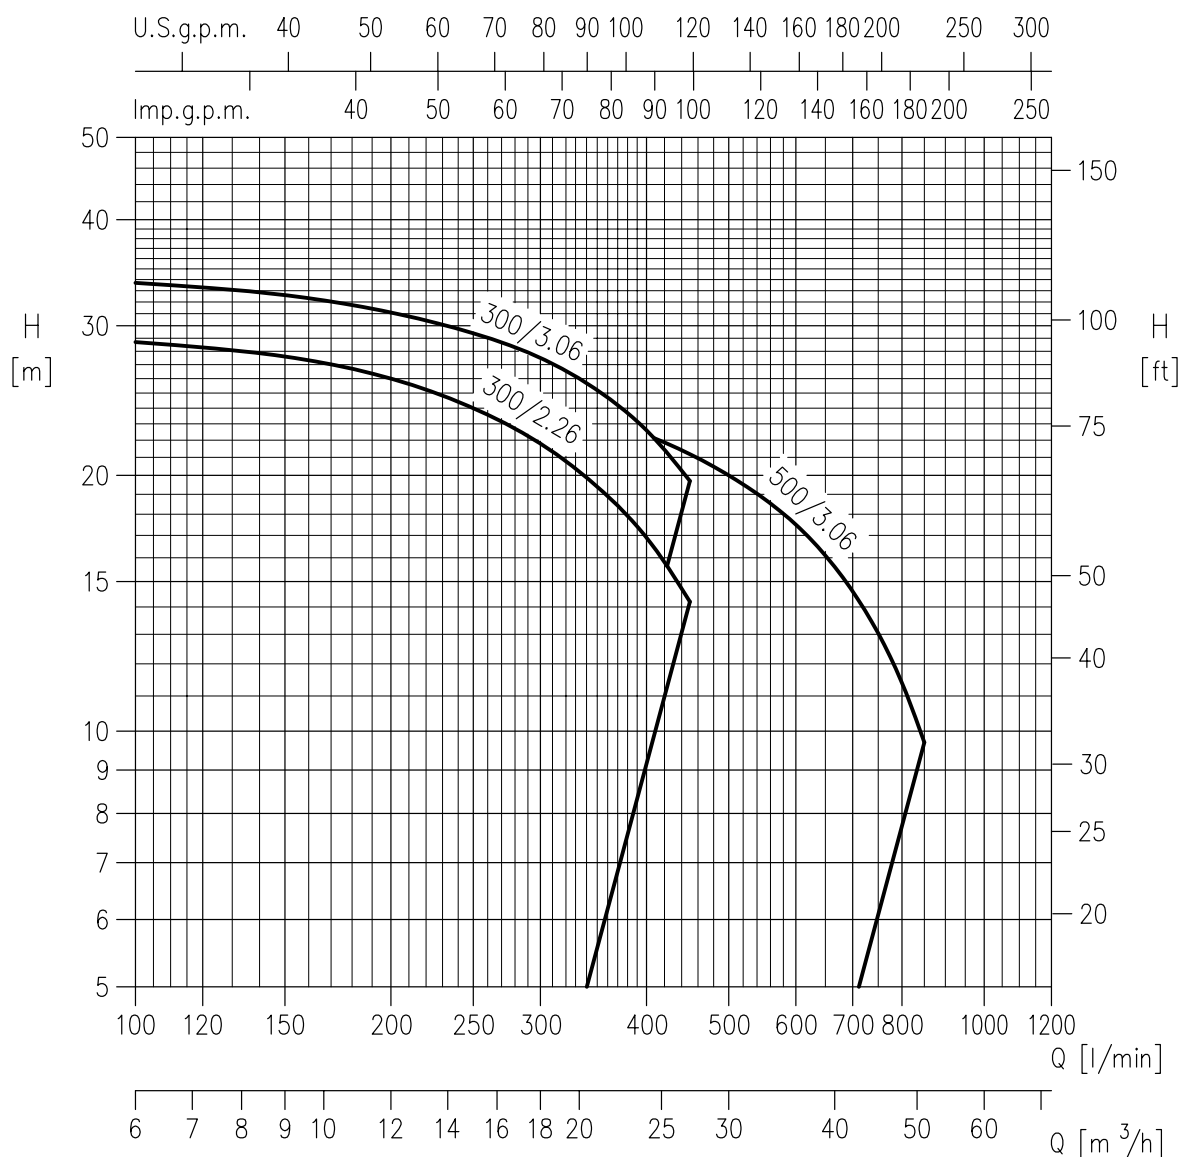

SELECTION CHART


Pump type	Power		Q=Capacity														
	[kW]	[HP]	l/min	0	100	150	200	250	300	350	400	450	500	600	700	800	850
			m³/h	0	6	9	12	15	18	21	24	27	30	36	42	48	51
H=Total head in meters																	
DWC 300/2.26	2.2	3	30.0	28.7	27.6	26.0	24.0	21.8	19.4	16.9	14.2	-	-	-	-	-	-
DWC 300/3.06	3.0	4	35.0	33.7	32.6	31.1	29.4	27.5	25.2	22.6	19.7	-	-	-	-	-	-
DWC 500/3.06	3.0	4	27.0	-	-	25.8	25.1	24.3	23.3	22.3	21.2	20.0	17.5	14.6	11.4	9.7	-

TYPE KEY and CURVES SPECIFICATIONS

60Hz

Rev. F

TYPE KEY

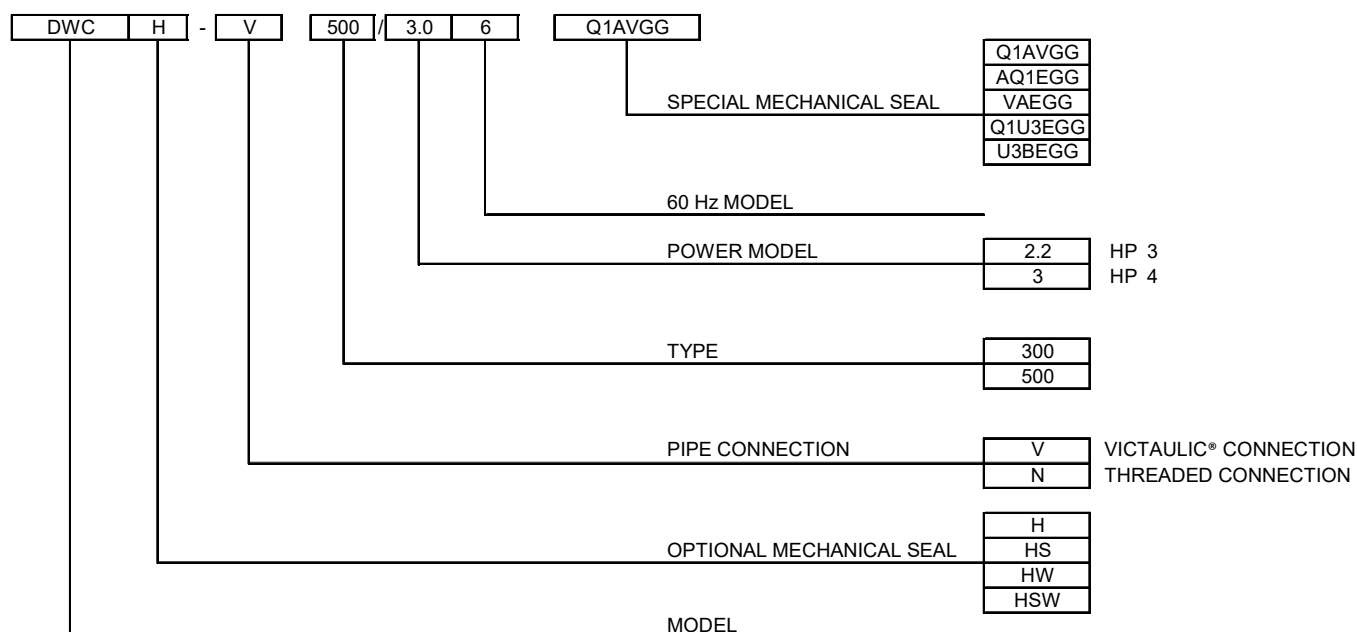

CURVES SPECIFICATIONS

The specifications below qualify the curves shown on the following pages.

Tolerances according to ISO 9006:2012 - Grade 3B

The curves refer to effective speed of asynchronous motors at 60 Hz, 2 poles.

Measurements were carried out with clean water at 20°C of temperature and with a kinematic viscosity of $\nu = 1 \text{ mm}^2/\text{s}$ (1 cSt)


The NPSH curve is an average curve obtained in the same conditions of performance curves.

The continuous curves indicate the recommended working range. The dotted curve is only a guide.

In order to avoid the risk of over-heating, the pumps should not be used at a flow rate below 10% of best efficiency point.


Symbols explanation:

- Q = volume flow rate
- H = total head
- P_2 = pump power input (shaft power)
- η = pump efficiency
- NPSH = net positive suction head required by the pump

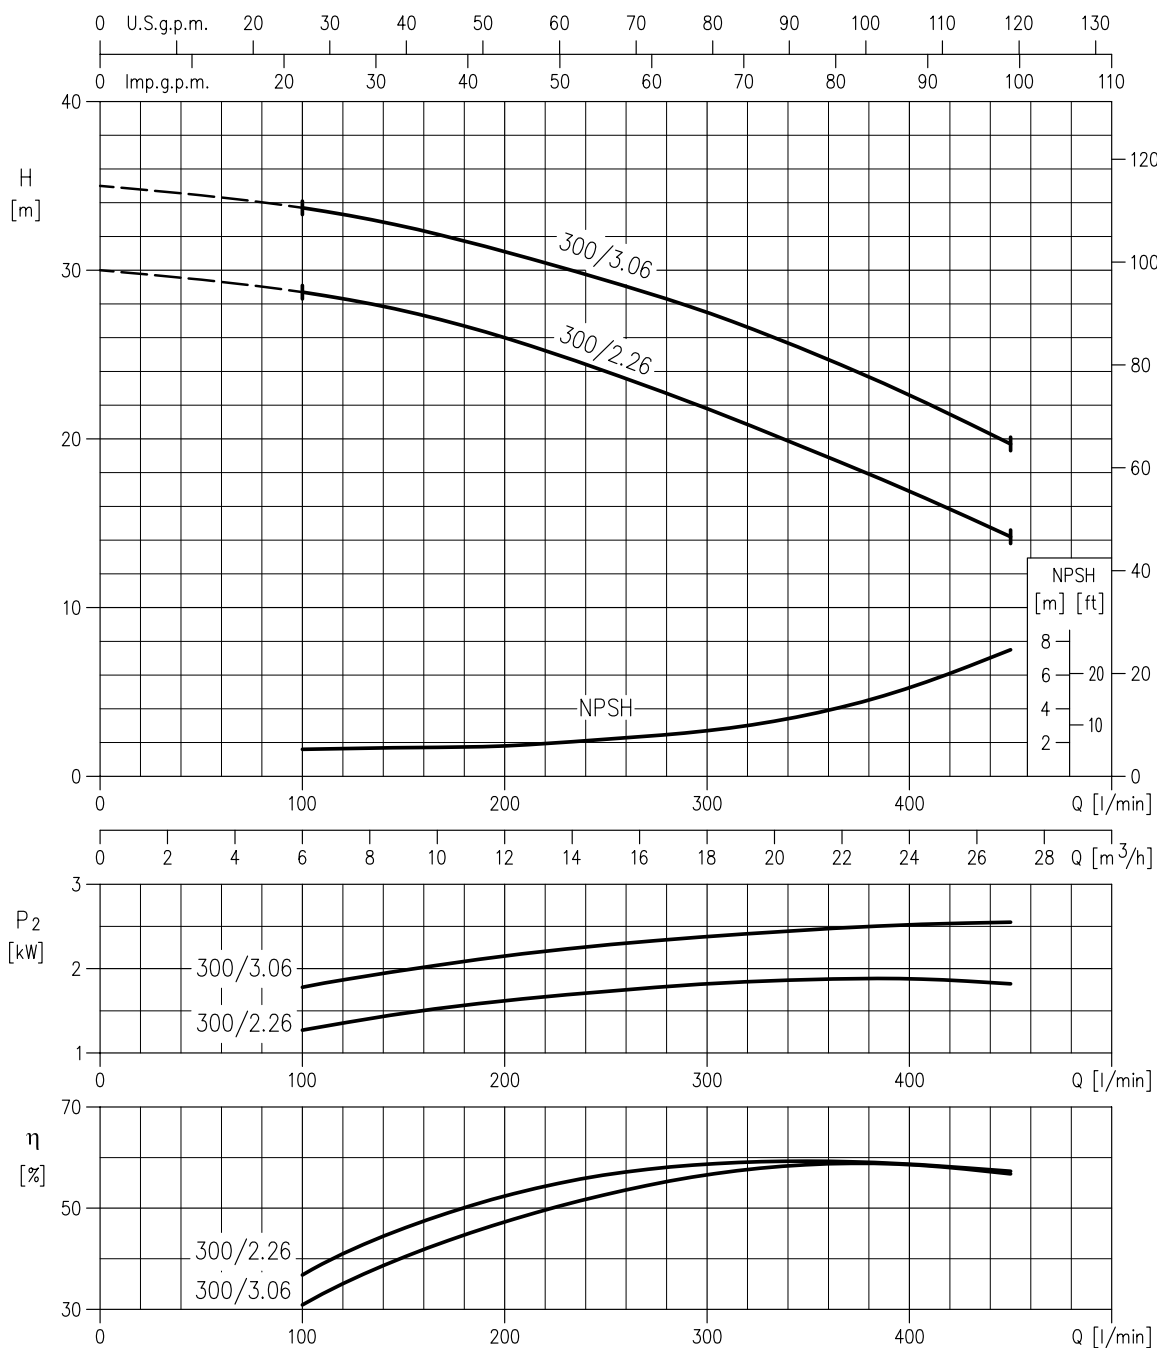300/2.26 (2.2 kW) – Impeller diameter = 133 mm**300/3.06 (3.0 kW) – Impeller diameter = 148 mm**

Rotation speed $\approx 3450 \text{ min}^{-1}$
Test standard: ISO 9006:2012 - Grade 3B


500/3.06 (3.0 kW) – Impeller diameter = 125 mm

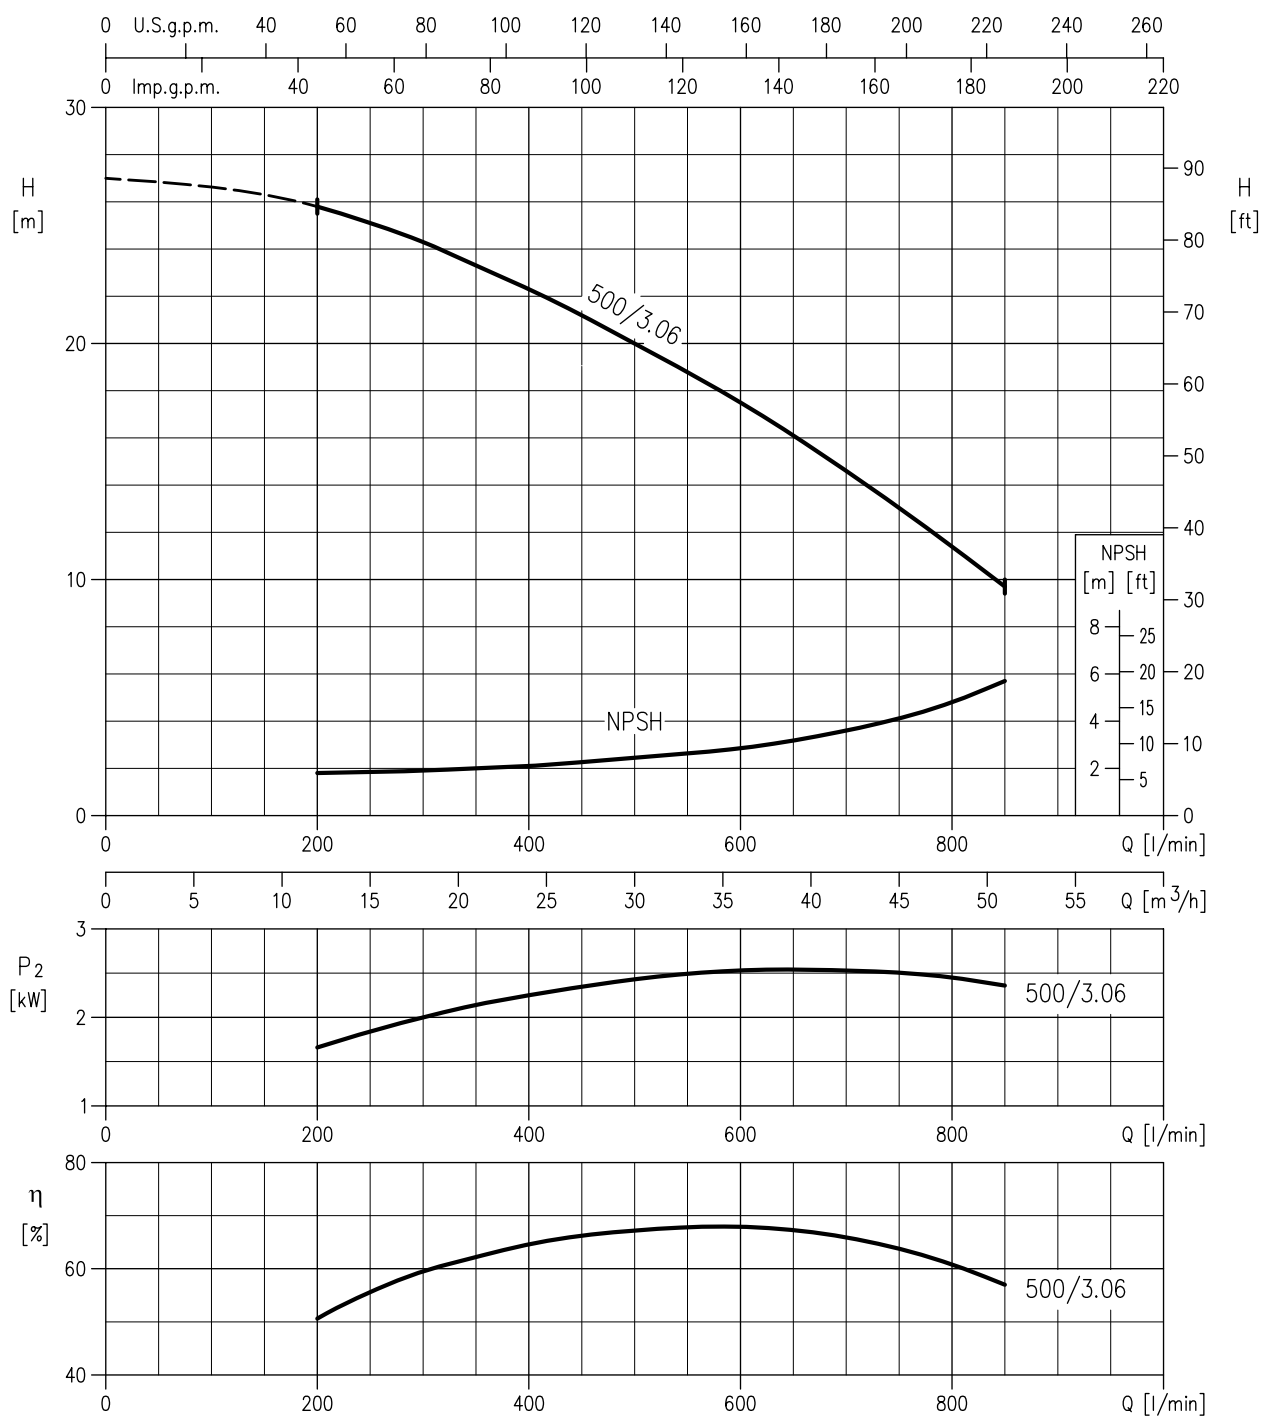


Rotation speed $\approx 3450 \text{ min}^{-1}$
Test standard: ISO 9006:2012 - Grade 3B

SECTIONAL VIEW DRAWING

DWC-V (Victaulic® connection)

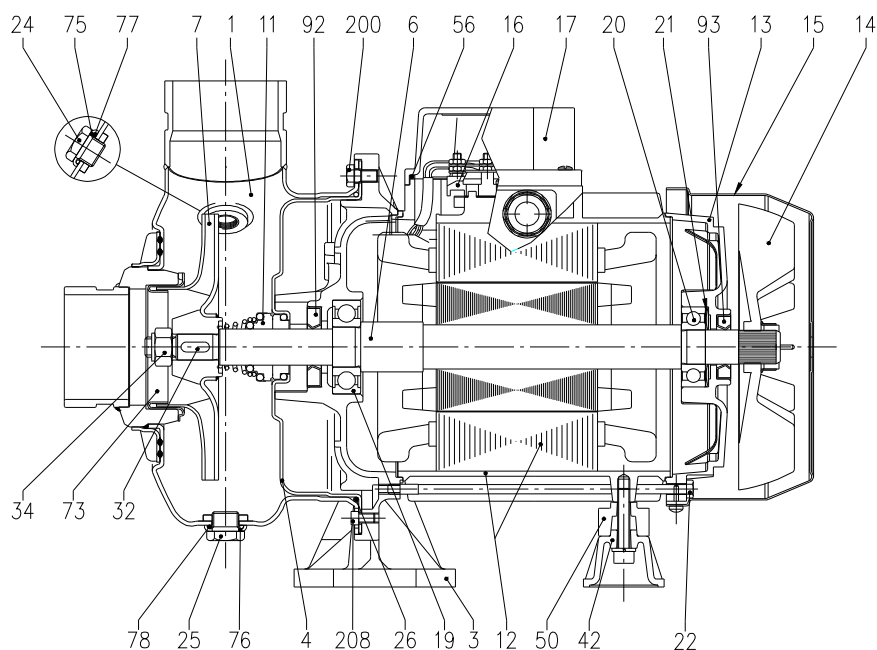

DWC-N (Threaded connection)

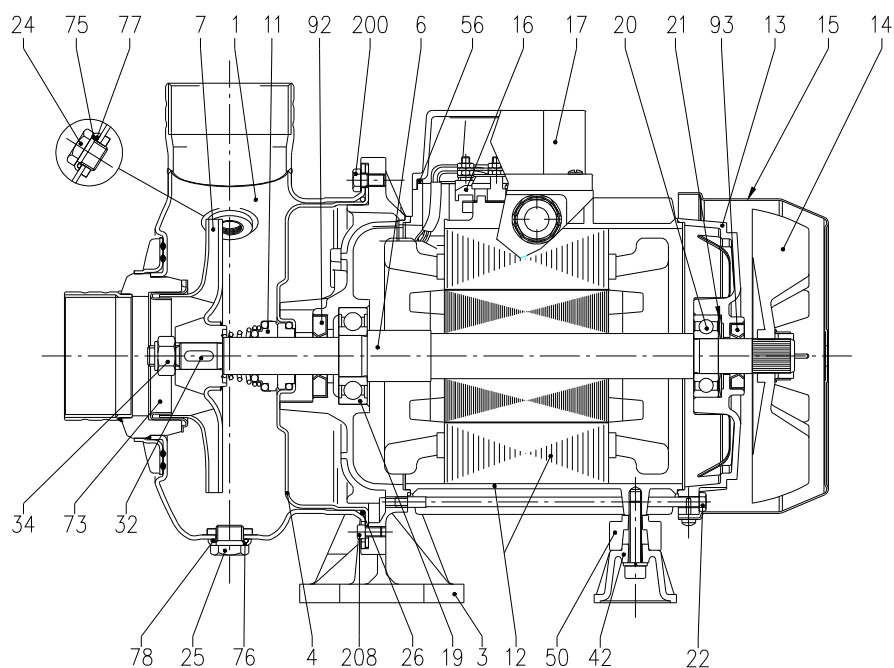

SECTIONAL VIEW TABLE

N°	PART NAME	MATERIAL	DIMENSIONS	STANDARD	Q.TY
1	Casing	EN 1.4301 (AISI 304)			1
3	Motor bracket	Aluminium			1
4	Casing cover	EN 1.4301 (AISI 304)			1
6	Shaft with rotor	EN 1.4301(AISI 304) (Wet extension)			1
7	Impeller	EN 1.4301 (AISI 304)			1
11	Mechanical seal [3]	Ceramic / Carbon / EPDM			1
12	Motor frame with stator	-			1
13	Motor cover	Aluminium			1
14	Fan	PA6			1
15	Fan cover	Fe P04 Zincate			1
16	Terminal board	-			1
17	Terminal board cover	Aluminium			1
19	Bearing [2]	-			1
20	Bearing [2]	-			1
21	Adjusting ring	Steel C70			1
22	Tie rod	Fe 42 Zincate		EBARA drawing	4
24	Priming plug	EN 1.4301 (AISI 304)	G 1/4"	EBARA drawing	1
25	Draing plug	EN 1.4301 (AISI 304)	G 1/4"	EBARA drawing	1
26	O-ring [1]	EPDM / FPM	148,8x3,53	OR 4587	1
32	Key	EN 1.4401 (AISI 316)	5x5x16	UNI 6604	1
34	Impeller nut	EN 1.4301 (AISI 304)	M10x1.25	UNI 7474	1
42	Foot	Aluminium / Zincate steel		EBARA drawing	1
50	Spacer	-			1
56	Box gasket	NBR			1
73	Casing ring	EN 1.4301 (AISI 304)			1
75	Washer	EN 1.4301 (AISI 304)		EBARA drawing	1
76	Washer	EN 1.4301 (AISI 304)		EBARA drawing	1
77	O-ring [1]	EPDM / FPM	13,1x2,62	OR 117	1
78	O-ring [1]	EPDM / FPM	13,1x2,62	OR 117	1
92	Lip seal	-	18x40x7	DIN 3760 without spring	1
93	Lip seal	-	25x40x7	DIN 3760 without spring	1
200	Screw	Stainless steel A2-70 class ISO 3506/1	M 6x12	UNI 5739	6
208	Screw	Stainless steel A2-70 class ISO 3506/1	M 5x12	UNI 5931	4


[1] FPM for H-HS-HW-HSW-Q1AVGG (see pages 302, 303)

EPDM for STANDARD-AQ1EGG-VAEGG-Q1U3EGG-U3BEGG (see pages 302, 303)

[2] See **BEARINGS** page 303

[3] See **MECHANICAL SEAL** pages 302, 303

MECHANICAL SEAL

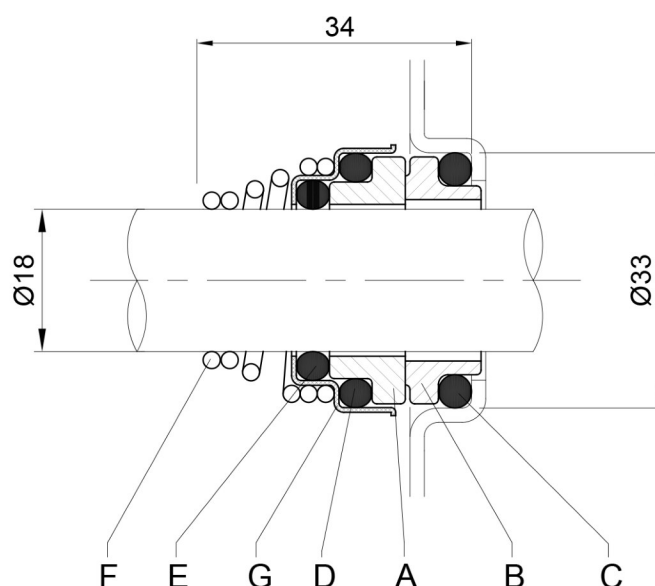

REF	PART NAME	MATERIAL
A	Rotary seal ring	Ceramic
B	Stationary seal ring	Carbon graphite
C	O-ring	EPDM
D	O-ring	EPDM
E	O-ring	EPDM
F	Self driving spring	AISI 316
G	Frame	AISI 304

STANDARD


REF	PART NAME	MATERIAL			
		H	HS	HW	HSW
A	Rotary seal ring	Ceramic	Silicon carbide	Tungsten carbide	Silicon carbide
B	Stationary seal ring	Carbon graphite	Silicon carbide	Tungsten carbide	Tungsten carbide
C	O-ring	FPM	FPM	FPM	FPM
D	O-ring	FPM	FPM	FPM	FPM
E	O-ring	FPM	FPM	FPM	FPM
F	Self driving spring	AISI 316	AISI 316	AISI 316	AISI 316
G	Frame	AISI 304	AISI 316	AISI 316	AISI 316

OPTIONAL

REF	PART NAME	MATERIAL			
		Q1AVGG	VAEGG	Q1U3EGG	U3BEGG
A	Rotary seal ring	Silicon carbide	Ceramic	Silicon carbide	Tungsten carbide
B	Stationary seal ring	Metallised carbon	Metallised carbon	Tungsten carbide	Graphite
C	O-ring	FPM	EPDM	EPDM	EPDM
D	O-ring	FPM	EPDM	EPDM	EPDM
E	O-ring	FPM	EPDM	EPDM	EPDM
F	Self driving spring	AISI 316	AISI 316	AISI 316	AISI 316
G	Frame	AISI 316	AISI 316	AISI 316	AISI 316

SPECIAL

MECHANICAL SEAL

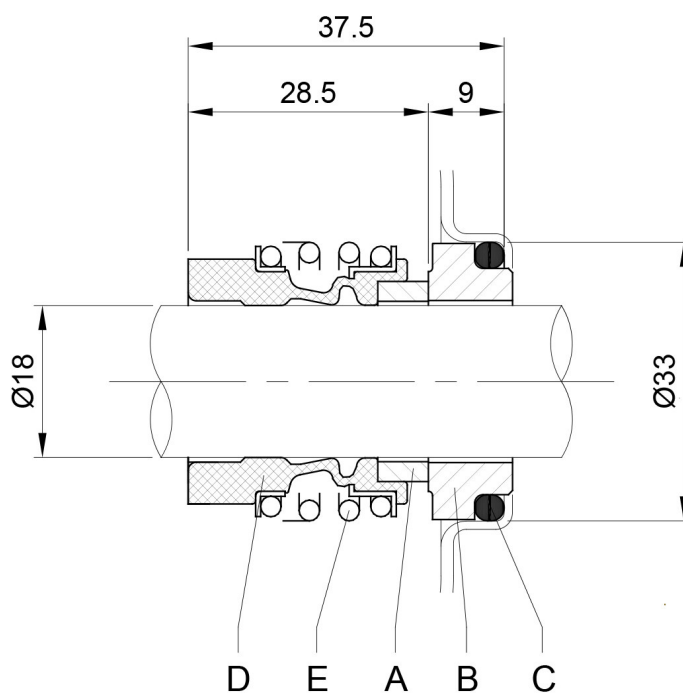

SPECIAL

REF	PART NAME	MATERIAL
		AQ1EGG
A	Rotary seal ring	Metallised carbon
B	Stationary seal ring	Silicon carbide
C	O-ring	EPDM
D	Bellows	EPDM
E	Frame + spring	AISI 316

BEARINGS

Pump type	Ball Bearing	
	Pump side	Fan side
DWC 300/2.26	6305-ZZ C3	6205-ZZ C3
DWC 300/3.06		
DWC 500/3.06		

FLUID TEMPERATURE RANGE

The maximum allowable temperature for the pumped fluid is a determining factor for the operational life of the pump. A primary role in this limitation is played by the materials of the mechanical seals (rings and elastomers), whose thermal resistance often defines the upper limit. The general construction materials of the pump (casing, impeller) and the lubricant used also contribute to defining the maximum temperature. Although the fluid properties and operating conditions have an impact, the choice of suitable seal materials for the operating temperature is crucial to prevent leaks and ensure the reliability of the pumping system.

To preserve optimal performance and prevent failures, we recommend to operate within the following limits:


STANDARD mechanical seal	TEMPERATURE	
	MIN	MAX
STANDARD	-15 °C	120 °C

OPTIONAL mechanical seal	TEMPERATURE	
	MIN	MAX
H *	-15 °C	110 °C
HS *	-15 °C	110 °C
HW *	-15 °C	110 °C
HSW *	-15 °C	110 °C

SPECIAL mechanical seal	TEMPERATURE	
	MIN	MAX
Q1AVGG *	-15 °C	110 °C
AQ1EGG	-15 °C	120 °C
VAEGG	-15 °C	120 °C
Q1U3EGG	-15 °C	120 °C
U3BEGG	-15 °C	120 °C


* in case the pumped fluid is water in combination to FPM elastomers, a maximum temperature fluid of 75°C is recommended in order to guarantee a longer life of the sealing parts

THERMAL INSULATION

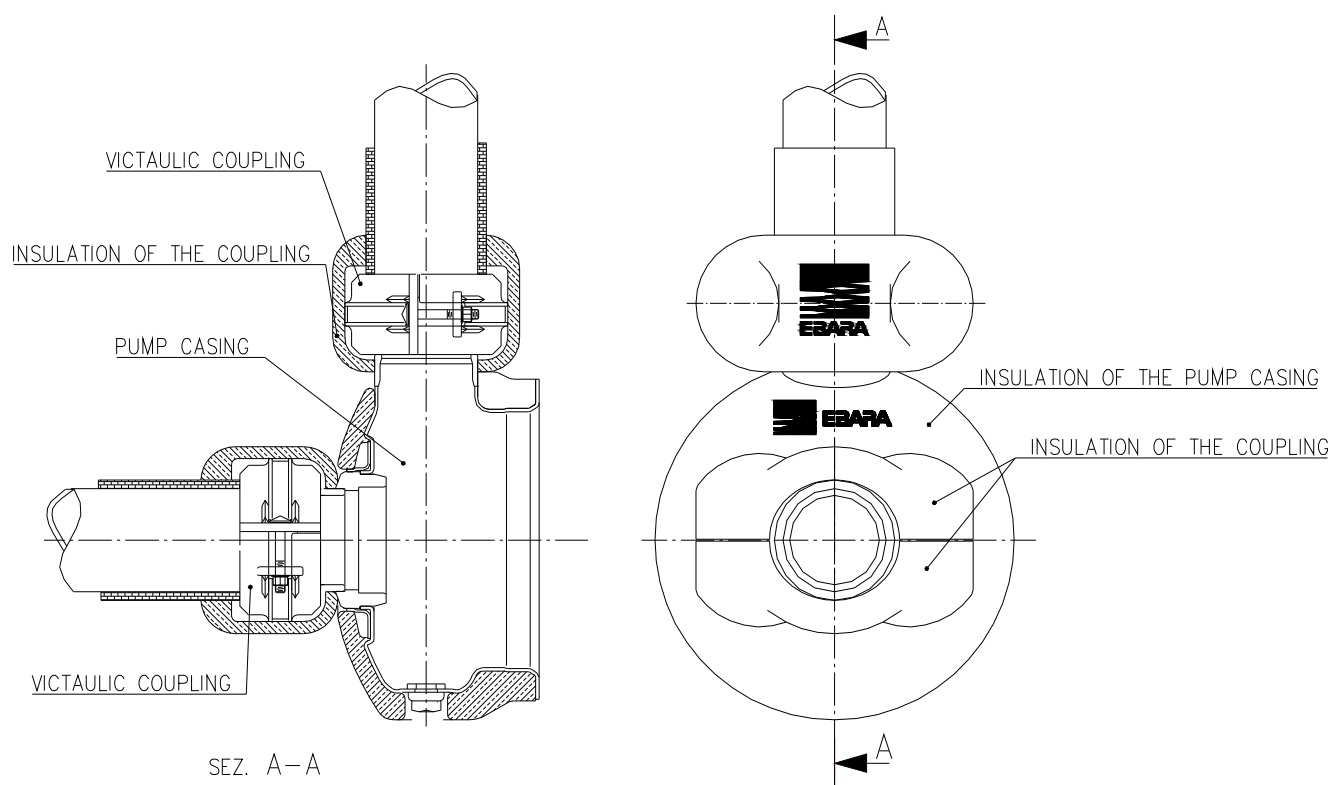


Pump type		INSULATION OF THE PUMP CASING	INSULATION OF THE COUPLING	VICTAULIC COUPLING
VICTAULIC CONNECTION	DWC-V 300/2.26	STANDARD	ON REQUEST	ON REQUEST
	DWC-V 300/3.06			
	DWC-V 500/3.06			
THREADED CONNECTION	DWC-N 300/2.26	ON REQUEST	NO NECESSARY	NO NECESSARY
	DWC-N 300/3.06			
	DWC-N 500/3.06			

DWC-V (VICTAULIC® CONNECTION)

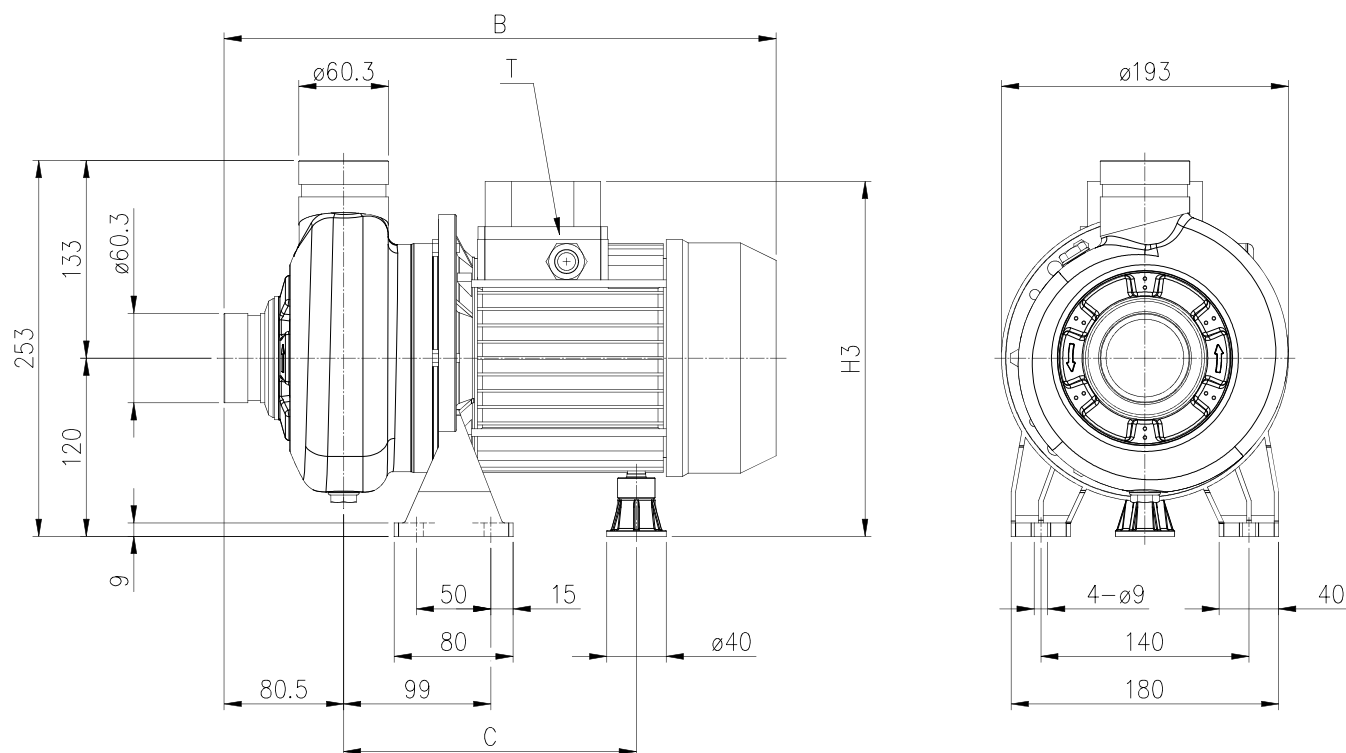


Pump type	Dimensions [mm]				Weight [kgf]
	B	C	H3	T	
DWC-V 300/2.26	397	230 ÷ 241	239	M20x1.5	20
DWC-V 300/3.06	457	230 ÷ 241	244	M20x1.5	22
DWC-V 500/3.06	457	230 ÷ 241	244	M20x1.5	22

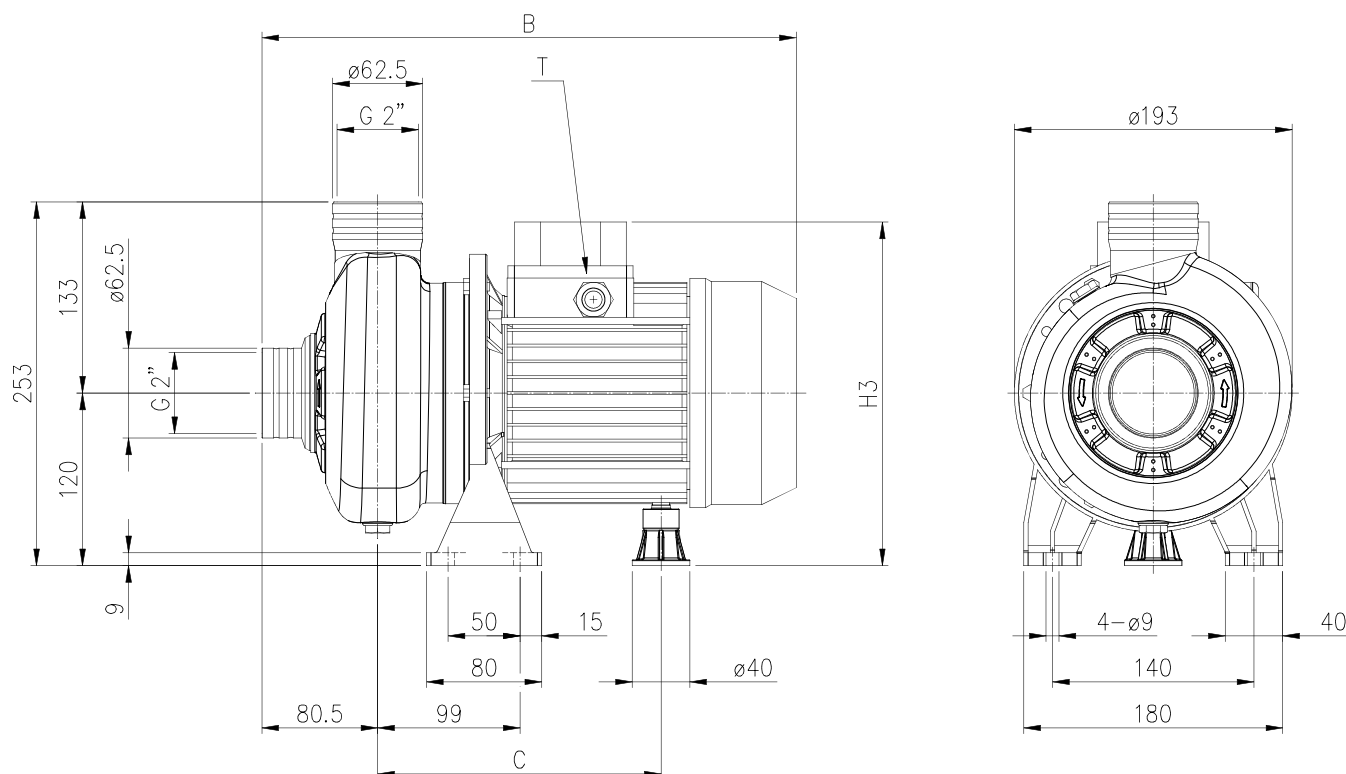DWC-N (THREADED CONNECTION)

Pump type	Dimensions [mm]				Weight [kgf]
	B	C	H3	T	
DWC-N 300/2.26	397	230 ÷ 241	239	M20x1.5	20
DWC-N 300/3.06	457	230 ÷ 241	244	M20x1.5	22
DWC-N 500/3.06	457	230 ÷ 241	244	M20x1.5	22

PACKING

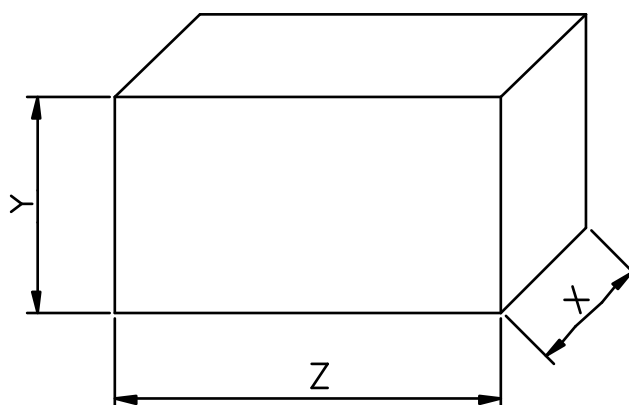

Pump type	Packing [mm]			Weight [kgf]
	X	Y	Z	
DWC 300/2.26	205	288	477	21
DWC 300/3.06	205	288	477	23
DWC 500/3.06	205	288	477	24

MOTOR DATA

Pump type	Power		Efficiency Three Phase	Efficiency (% load) Three phase (380 V) η %			Efficiency (% load) Three phase (460 V) η %			Input [kW] Three Phase	Full load current [A] Three Phase			Locked rotor current [A] Three Phase		
	[kW]	[HP]		50%	75%	100%	50%	75%	100%		220 V	380 V	460 V	220 V	380 V	460 V
DWC 300/2.26	2.2	3.0	IE3*	86.5	86.8	86.2	86.9	87.8	87.4	2.48	7.5	4.3	4.1	55.7	32.2	38.9
DWC 300/3.06	3.0	4.0	IE3*	86.8	87.0	87.5	87.0	87.9	88.5	3.42	10.2	5.9	5.6	75.7	43.7	52.8
DWC 500/3.06	3.0	4.0	IE3*	86.8	87.0	87.5	87.0	87.9	88.5	3.42	10.2	5.9	5.6	75.7	43.7	52.8

* At 220/380V efficiency level is IE2; IE3 only at 460V



EBARA Pumps Europe S.p.A.
Via Torri di Confine 2/1 int. C
36053 Gambellara (Vicenza), Italy
Phone +39 0444 706811
ebarapumps.epe@ebaracom
www.ebaraeurope.com

EBARA Pumps Europe S.p.A. GERMANY
Elisabeth-Selbert-Straße 2
63110 Rodgau, Germany
Phone +49 (0) 6106-660 99-0
info.epde@ebaracom

EBARA Pumps South Africa (PTY) LTD
26 Kyalami Boulevard,
Kyalami Business Park, 1684, Midrand,
Gauteng, South Africa
Phone +27 11 466 1844
ebaraepea@ebaracom

EBARA Pumps Europe S.p.A. UK
Unit A, Park 34
Collett Way - Didcot
Oxfordshire - OX11 7WB, United Kingdom
Phone +44 1895 439027
marketing.epuk@ebaracom

EBARA Pumps Europe S.p.A. FRANCE
122, Rue Pasteur
69780 Toussieu, France
Phone: +33 04 72 76 94 82
mktg.epr@ebaracom

EBARA Pumps East Africa
Delta Corner Tower 2, 13th Floor, Office 1308,
Chiromo Road, Westlands
P.O. Box 13796-00800, Nairobi
Phone: +254(0)722913119
info.epea@ebaracom

EBARA POMPY POLSKA Sp. z o.o.
ul. Działkowa 115 A
02-234 Warszawa, Poland
Phone +48 22 3909920
marketing.epl@ebaracom

EBARA Pumps RUS Ltd.
Prospekt Andropov 18, building 7, floor 11
115432 Moscow
Phone +7 499 6830133
mktg.epr@ebaracom